Glen Osmond Road and Fullarton Road Intersection Upgrade

Roads

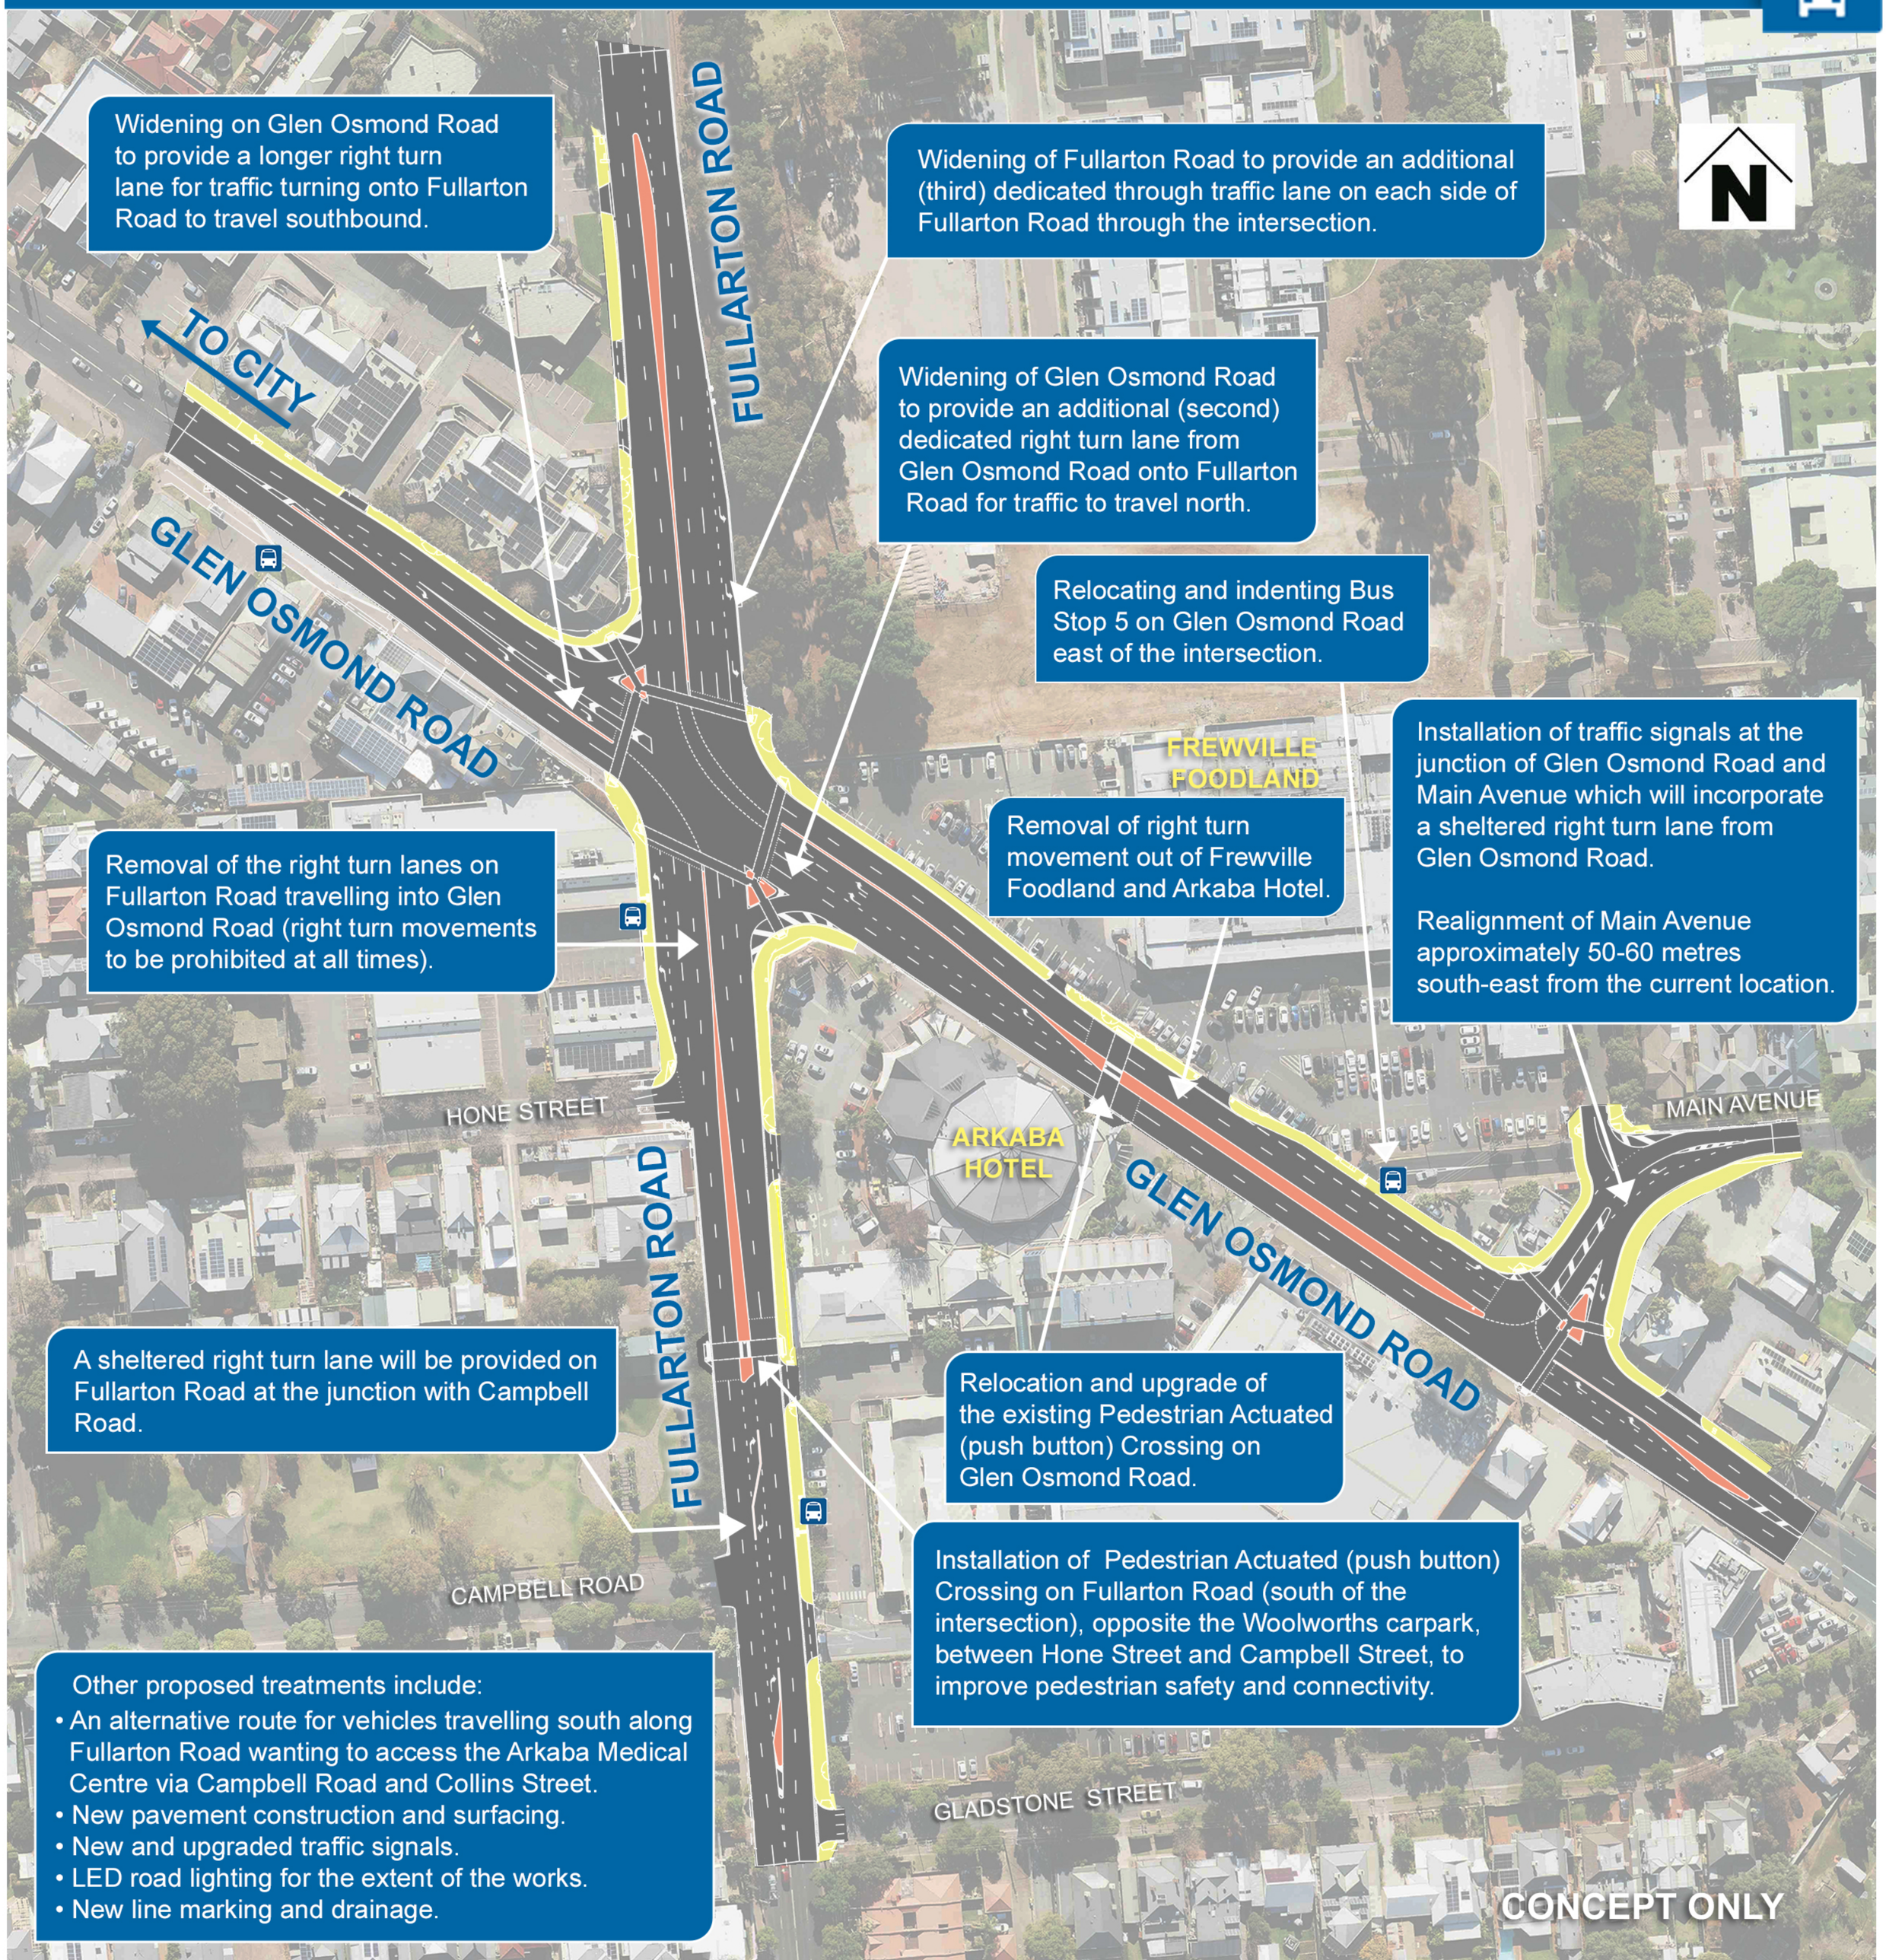

Widening on Glen Osmond Road to provide a longer right turn lane for traffic turning onto Fullarton Road to travel southbound.

Widening of Fullarton Road to provide an additional (third) dedicated through traffic lane on each side of Fullarton Road through the intersection.

Widening of Glen Osmond Road to provide an additional (second) dedicated right turn lane from Glen Osmond Road onto Fullarton Road for traffic to travel north.

Relocating and indenting Bus Stop 5 on Glen Osmond Road east of the intersection.

Installation of traffic signals at the junction of Glen Osmond Road and Main Avenue which will incorporate a sheltered right turn lane from Glen Osmond Road.

Realignment of Main Avenue approximately 50-60 metres south-east from the current location.

Removal of right turn movement out of Frewville Foodland and Arkaba Hotel.

Removal of the right turn lanes on Fullarton Road travelling into Glen Osmond Road (right turn movements to be prohibited at all times).

A sheltered right turn lane will be provided on Fullarton Road at the junction with Campbell Road.

Relocation and upgrade of the existing Pedestrian Actuated (push button) Crossing on Glen Osmond Road.

Installation of Pedestrian Actuated (push button) Crossing on Fullarton Road (south of the intersection), opposite the Woolworths carpark, between Hone Street and Campbell Street, to improve pedestrian safety and connectivity.

Other proposed treatments include:

- An alternative route for vehicles travelling south along Fullarton Road wanting to access the Arkaba Medical Centre via Campbell Road and Collins Street.
- New pavement construction and surfacing.
- New and upgraded traffic signals.
- LED road lighting for the extent of the works.
- New line marking and drainage.